

MRS19 Series - Door Contact Switch

SHR AUTOSENSOR TECH LIMITED Website: www.reed-relay.com

Email: sales@reed-relay.com

1. Features

- Output reliable contact switch
- High-end sensor applications
- High insulation resistance, up to $10^9 \Omega$
- Suitable for low power operation
- Custom design available
- Conforming to RoHS directive

2. Performance Data

Parameter	Units	Value
Model	/	A (NO)
Rated Power (max.)	W	10
Switching Voltage (Max DC/Peak AC)	V	100
Switching Current (Max DC/Peak AC)	A	0.5
Carry Current (max.)	A	1.0
Contact Resistance (@0.5V & 50mA)	m Ω	100
Breakdown Voltage	VDC	200
Insulation Resistance (Rh <45%, 100V Test Voltage)	Ω	10^9
Operating Time (max.)	ms	0.7
Release Time (max.)	ms	0.05
Capacitance (typ.)	pF	0.3
Vibration Resistance	G	20
Shock Resistance (1/2 sine wave, 11ms)	G	30
Operating Temperature	$^{\circ}\text{C}$	-30 +80


Parameter	Units	Value
Storage Temperature	°C	-40 +85

3. Example of Order Marking

MRS19 - □ - □ - □ - □ (XXX)

Position	Description	Options
①	Product model	MRS19
②	Contact form	1A: 1 Form A (NO)
③	Switch characteristic	1: 10W
④	Magnetic sensitivity (AT)	A: 05-10; B: 10-15; C: 15-20; D: 20-25; E: 25-30; F: 30-35; G: 35-40
⑤	Cable Length (mm)	1: 200; 2: 300; 3: 500; 4: 1000; 5: 1500; 6: 2000; 7: 3000; 8: 5000
⑥	Special code	Customer special requirement


4. Outline Drawing

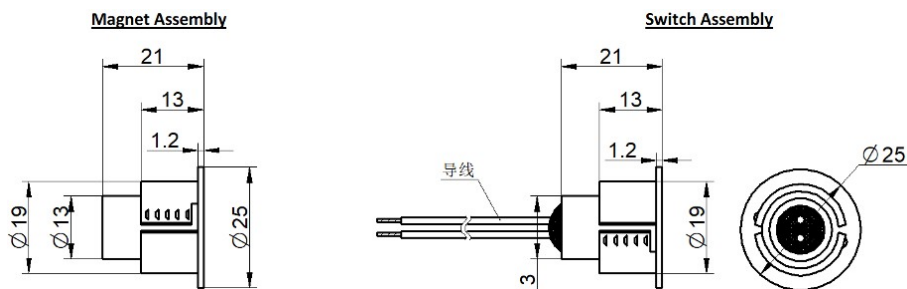

MRS19 Outline Drawing

Standard housing dimensions and mounting configuration for MRS19 series door contact switches. Optimized for security and access control applications with compact design for discreet installation.

5. Characteristics

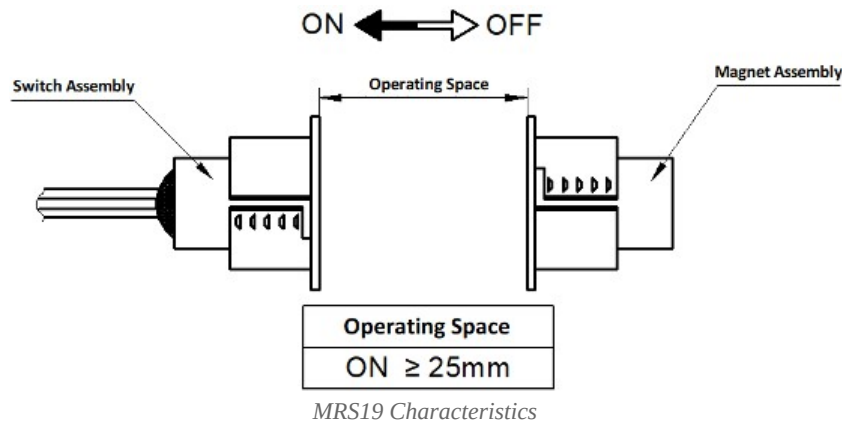

Electrical and mechanical characteristics curve for MRS19 series door contact switches showing operating range and sensitivity profiles.

6. Precautions for Use

1. **Environment:** Avoid installation in areas directly exposed to rain, strong magnetic fields, or near objects with thermal radiation.
2. **Density:** Avoid excessive bulk density in use, which may affect the electrical characteristics of the switch.
3. **Mechanical Shock:** Excessive mechanical shock strength may change its magnetic sensitivity or even damage the switch.
4. **Soldering:** Use appropriate pin tightening or heat dissipation to prevent mechanical or thermal stress during welding.
5. **Wire Handling:** The minimum bending distance from the wire to the housing is 5mm, and dragging is prohibited.

Technical Support

For specific parameters and performance details, please refer to the specifications and samples provided by SHR AUTOSENSOR TECH LIMITED.

Performance parameters vary from application area to application area. Customers should choose the appropriate product according to the specific conditions of use.

Contact Information:

SHR AUTOSENSOR TECH LIMITED ✉ Email: sales@reed-relay.com

🌐 Website: www.reed-relay.com

Disclaimer

This document is for customer reference only. Specifications and parameters may be changed due to product improvement without further notice.

Document Version: 2.0 © 2026 SHR AUTOSENSOR TECH LIMITED. All rights reserved.