


## DIL-2C05

### High Voltage Reed Relay

#### PRODUCT VISUAL



real source image

#### KEY RATINGS

NOMINAL COIL VOLTAGE

**5 VDC**

MAX PULL-IN VOLTAGE

**3.5 VDC**

MIN DROP-OUT VOLTAGE

**0.75 VDC**

MAXIMUM COIL VOLTAGE

**7.5 VDC**

CONTACT FORM

**2 Form C / DPDT**

MAX CONTACT RATING

**5 W**

#### OVERVIEW

- 14-pin dual in-line package
- 5 VDC coil, fast switching
- 2 Form C changeover contacts
- RoHS compliant; custom design

#### COIL DATA

Nominal Coil Voltage	<b>5 VDC</b>
Max Pull-in Voltage	<b>3.5 VDC</b>
Min Drop-out Voltage	<b>0.75 VDC</b>
Maximum Coil Voltage	<b>7.5 VDC</b>
Coil Resistance	<b>150 ohm ±10%</b>

#### CONTACT RATINGS

Contact Form	<b>2 Form C / DPDT</b>
Max Contact Rating	<b>5 W</b>
Max Switching Voltage	<b>175 VDC / Peak AC</b>
Max Switching Current	<b>0.25 A DC / Peak AC</b>
Max Carry Current	<b>1.5 A</b>
Max Contact Resistance	<b>200 mOhm</b>
Dielectric Open Contacts	<b>200 VDC</b>
Dielectric Coil/Contact	<b>1400 VDC</b>


#### ELECTRICAL CHARACTERISTICS

Insulation Resistance	<b>1E9 ohm</b>
Operate Time	<b>0.7 ms</b>
Release Time	<b>1.0 ms</b>
Expected Life	<b>5×10<sup>7</sup> ops</b>


#### ENVIRONMENTAL / OPTIONS

Vibration Resistance	<b>20 G, 0-2000 Hz</b>
Shock Resistance	<b>50 G, 11 ms half-sine</b>
Operating Temperature	<b>-40°C to +85°C</b>
Storage Temperature	<b>-40°C to +105°C</b>

#### MECHANICAL OUTLINE / DIMENSIONS

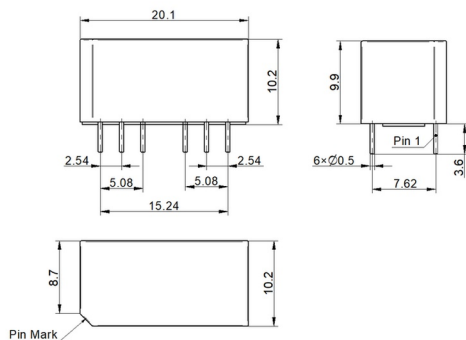

#### CIRCUIT / MARKING / TERMINAL VIEW

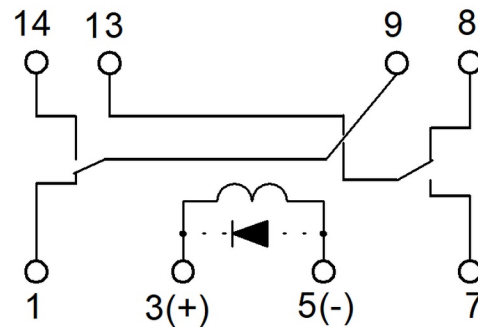

#### ORDERING & SOURCE TRACEABILITY

**DIL-2C05 / 5 VDC / 2 Form C / Standard**

Source: DIL□□□□□□□□.pdf

Technical values are preserved from source PDFs / generated metadata. Original outline and circuit figures are reused where available; do not treat artwork proportions as standalone dimensional authority.