


HRM24-20A04

High Voltage Reed Relay Module

PRODUCT VISUAL

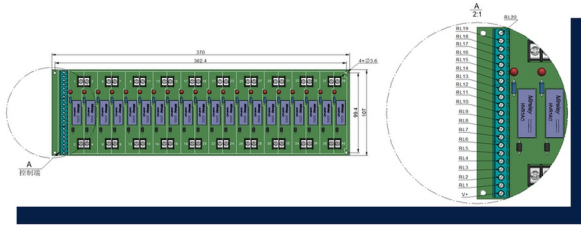

source pdf technical module image or outline

KEY RATINGS

COIL VOLTAGE
24 VDC

CONTACT FORM
20 Form A

CHANNELS
20

SWITCH VOLTAGE
1 kV

BREAKDOWN
4 kVDC

CONTACT RATING
100 W

OVERVIEW

- Multi-channel high-voltage reed relay module
- DIN rail / cabinet integration friendly
- Custom configuration support
- Key ratings: 24 VDC 20 Form A 20 1 kV 4 kVDC 100 W
- Source-PDF outline and wiring retained

COIL DATA

Nominal	24 VDC
Pickup	18 VDC max
Dropout	2 VDC min
Max voltage	29 VDC
Resistance	1400 Ω

CONTACT RATINGS

Contact Form	20 Form A
Channels	20
Contact Rating	100 W
Max Switching Voltage	1 kV
Max Switching Current	1.0 A
Max Carry Current	2.5 A
Contact Resistance	150 mΩ
Breakdown Voltage	4 kVDC

ELECTRICAL CHARACTERISTICS


Contact-to-Coil Dielectric	4 kVDC
Insulation Resistance	1×10¹¹ Ω
Operate Time	1.0 ms
Release Time	0.1 ms

ENVIRONMENTAL / OPTIONS

Operating Temperature	-20°C to +70°C
Storage Temperature	-35°C to +105°C

MECHANICAL OUTLINE / DIMENSIONS

Source outline / terminal view

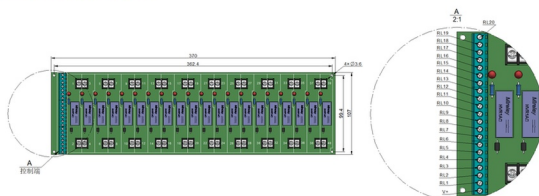

CIRCUIT / MARKING / TERMINAL VIEW

Source wiring diagram



ORDERING & SOURCE TRACEABILITY

HRM24-20A04 — High Voltage Reed Relay Module

Source: HRM(20A)□□□□□□□□□□v2.0.pdf

Technical values are preserved from source PDFs / generated metadata. Original outline and circuit figures are reused where available; do not treat artwork proportions as standalone dimensional authority.