

HRM24-2B15

High Voltage Reed Relay Module

PRODUCT VISUAL



real hrm family product image from project library

KEY RATINGS

COIL VOLTAGE
24 VDC

CONTACT FORM
2 Form B

CHANNELS
2

SWITCH VOLTAGE
10 kV

BREAKDOWN
15 kVDC

CONTACT RATING
10 W

OVERVIEW

- Multi-channel high-voltage reed relay module
- DIN rail / cabinet integration friendly
- Custom configuration support
- Key ratings: 24 VDC 2 Form B 2 10 kV 15 kVDC 10 W
- Source-PDF outline and wiring retained

COIL DATA

Nominal	24 VDC
Pickup	18 VDC max
Dropout	2 VDC min
Max voltage	29 VDC
Resistance	600 Ω

CONTACT RATINGS

Contact Form	2 Form B
Channels	2
Contact Rating	10 W
Max Switching Voltage	10 kV
Max Switching Current	3.5 A
Max Carry Current	5.0 A
Contact Resistance	150 mΩ
Breakdown Voltage	15 kVDC

ELECTRICAL CHARACTERISTICS


Contact-to-Coil Dielectric	15 kVDC
Insulation Resistance	1×10 ¹² Ω
Operate Time	3.0 ms
Release Time	1.5 ms

ENVIRONMENTAL / OPTIONS

Operating Temperature	-20°C to +70°C
Storage Temperature	-35°C to +105°C


MECHANICAL OUTLINE / DIMENSIONS

Source outline / terminal view

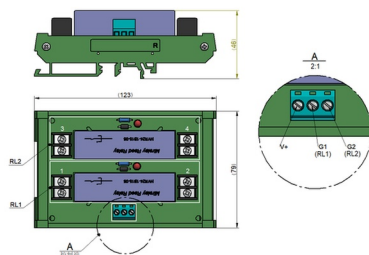

CIRCUIT / MARKING / TERMINAL VIEW

Source wiring diagram



ORDERING & SOURCE TRACEABILITY

HRM24-2B15 — High Voltage Reed Relay Module

Source: HRM(2B) series high voltage Reed Relay Module Sample V2.0.pdf

Technical values are preserved from source PDFs / generated metadata. Original outline and circuit figures are reused where available; do not treat artwork proportions as standalone dimensional authority.