


HVR05-1B10-150

High Voltage Reed Relay

PRODUCT VISUAL

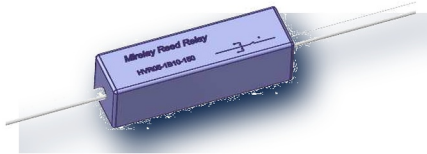

embedded pdf product render with exact hvr05 1b10 150 marking long lead

KEY RATINGS

COIL VOLTAGE

5 VDC

CONTACT FORM

1 Form B

SWITCH VOLTAGE

7.5 kVDC

CONTACT RATING

50 W

OVERVIEW

- High voltage reed relay
- Breakdown up to 10 kVDC
- Custom design available
- Low contact resistance
- Excellent lifetime characteristics

COIL DATA

Nominal Coil Voltage	5 VDC
Nominal Current	167 mA
Coil Resistance	30±10% Ω
Max Pull-in Voltage	4 VDC
Min Drop-out Voltage	0.5 VDC

CONTACT RATINGS

Contact Form	1 Form B
Max Contact Rating	50 W
Max Switch Voltage	7.5 kVDC
Max Switch Current	3.0 A
Max Carrying Current	5.0 A
Min Breakdown Voltage	10 kVDC
Max Contact Resistance	150 mΩ
Life Expectancy	5×10⁷ ops @500V 100mA


ELECTRICAL CHARACTERISTICS

Dielectric Open Contacts	10 kVDC
Dielectric Contact/Coil	15 kVDC
Insulation Open Contacts	1×10¹² Ω
Insulation Contact/Coil	1×10¹² Ω
Operate Time incl. Bounce	2.0 ms
Reset Time	2.0 ms
Capacitance	1.0 pF across open switch


ENVIRONMENTAL / OPTIONS

Vibration	20 G, 10-2KHz 1.5mm
Shock	50 G, 11ms half-sine
Operating Temperature	-20°C to +70°C
Storage Temperature	-35°C to +105°C
Soldering Temperature	260°C, 5 sec max
Washability	Fully sealed

MECHANICAL OUTLINE / DIMENSIONS

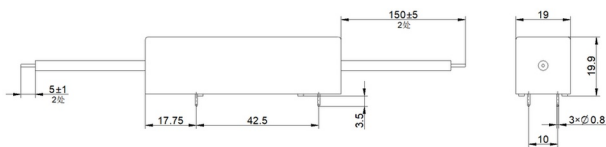


CIRCUIT / MARKING / TERMINAL VIEW



Mirelay Reed Relay

HVR05-1B10-150



ORDERING & SOURCE TRACEABILITY

HVR05-1B10-150 — HVR, 05 = 5 VDC, 1B = 1 Form B, 10 = 10 kVDC, Pin Out = 150, Special = blank

Source: HVR05-1B10-150.pdf

Technical values are preserved from source PDFs / generated metadata. Original outline and circuit figures are reused where available; do not treat artwork proportions as standalone dimensional authority.