


HVR05-2A06

High Voltage Reed Relay

PRODUCT VISUAL



embedded pdf product render with exact hvr05 2a06 marking

KEY RATINGS

COIL VOLTAGE

5 VDC

CONTACT FORM

1 Form A

SWITCH VOLTAGE

1 kVDC

CONTACT RATING

100 W

OVERVIEW

- High voltage reed relay
- Breakdown up to 6 kVDC
- Custom design available
- Low contact resistance
- Excellent lifetime characteristics

COIL DATA

Nominal Coil Voltage	5 VDC
Nominal Current	42 mA
Coil Resistance	120±10% Ω
Max Pull-in Voltage	4 VDC
Min Drop-out Voltage	0.5 VDC

CONTACT RATINGS

Contact Form	1 Form A
Max Contact Rating	100 W
Max Switch Voltage	1 kVDC
Max Switch Current	1.0 A
Max Carrying Current	2.5 A
Min Breakdown Voltage	6 kVDC
Max Contact Resistance	300 mΩ
Life Expectancy	5×10⁷ ops @500V 100mA


ELECTRICAL CHARACTERISTICS

Dielectric Open / Contact-Coil	6 / 6 kVDC
Insulation Open / Contact-Coil	1×10¹² / 1×10¹² Ω
Operate Time incl. Bounce	1.0 ms
Reset Time	0.1 ms
Capacitance	0.5 pF across open switch

ENVIRONMENTAL / OPTIONS


Vibration	20 G, 10-2KHz 1.5mm
Shock	50 G, 11ms half-sine
Operating Temperature	-20°C to +70°C
Storage Temperature	-35°C to +105°C
Soldering Temperature	260°C, 5 sec max
Washability	Fully sealed

MECHANICAL OUTLINE / DIMENSIONS

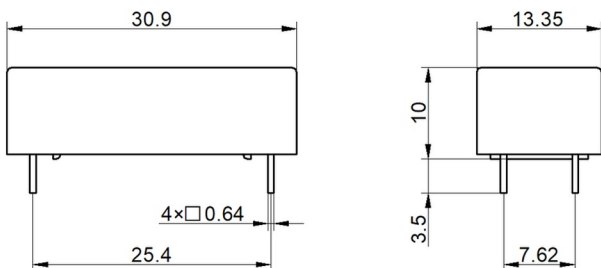

CIRCUIT / MARKING / TERMINAL VIEW



Mirelay 
HVR05-2A06

ORDERING & SOURCE TRACEABILITY

HVR05-2A06 — HVR, 05 = 5 VDC, 2A = 1 Form A, 06 = 6 kVDC, Pin Out = Nil, Special = Nil

Source: HVR05-2A06.pdf

Technical values are preserved from source PDFs / generated metadata. Original outline and circuit figures are reused where available; do not treat artwork proportions as standalone dimensional authority.