

# HVR24-1B15-04

## High Voltage Reed Relay

### PRODUCT VISUAL



embedded pdf product render with exact hvr24 1b15 04 marking

### KEY RATINGS

COIL VOLTAGE  
**24 VDC**

CONTACT FORM  
**1 Form B**

SWITCH VOLTAGE  
**10 kVDC**

CONTACT RATING  
**50 W**

### OVERVIEW

- High voltage reed relay
- Breakdown up to 15 kVDC
- Custom design available
- Low contact resistance
- Excellent lifetime characteristics

### COIL DATA

Nominal Coil Voltage	<b>24 VDC</b>
Nominal Current	<b>40 mA</b>
Coil Resistance	<b>600±10% Ω</b>
Max Pull-in Voltage	<b>18 VDC</b>
Min Drop-out Voltage	<b>2 VDC</b>

### CONTACT RATINGS

Contact Form	<b>1 Form B</b>
Max Contact Rating	<b>50 W</b>
Max Switch Voltage	<b>10 kVDC</b>
Max Switch Current	<b>3.0 A</b>
Max Carrying Current	<b>5.0 A</b>
Min Breakdown Voltage	<b>15 kVDC</b>
Max Contact Resistance	<b>150 mΩ</b>
Life Expectancy	<b>5×10<sup>7</sup> ops @500V 100mA</b>


### ELECTRICAL CHARACTERISTICS

Dielectric Open / Contact-Coil	<b>15 / 15 kVDC</b>
Insulation Open / Contact-Coil	<b>1×10<sup>12</sup> Ω each</b>
Operate Time incl. Bounce	<b>2.0 ms</b>
Reset Time	<b>2.0 ms</b>
Capacitance	<b>1.0 pF across open switch</b>


### ENVIRONMENTAL / OPTIONS

Vibration	<b>20 G, 10-2KHz 1.5mm</b>
Shock	<b>50 G, 11ms half-sine</b>
Operating Temperature	<b>-20°C to +70°C</b>
Storage Temperature	<b>-35°C to +105°C</b>
Soldering Temperature	<b>260°C, 5 sec max</b>
Washability	<b>Fully sealed</b>

### MECHANICAL OUTLINE / DIMENSIONS

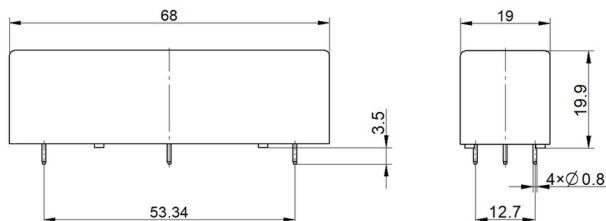

### CIRCUIT / MARKING / TERMINAL VIEW



Mirelay Reed Relay  
HVR24-1B15-04

### ORDERING & SOURCE TRACEABILITY

HVR24-1B15-04 — HVR, 24 = 24 VDC, 1B = 1 Form B, 15 = 15 kVDC, Pin Out = 04, Special = blank

Source: HVR24-1B15-04.pdf

Technical values are preserved from source PDFs / generated metadata. Original outline and circuit figures are reused where available; do not treat artwork proportions as standalone dimensional authority.