

HVR12-2A06-P00



SHR AUTOSENSOR TECH LIMITED

- High Voltage Reed Relay
- Coil Voltage 12V
- Breakdown Voltage up to 7KV

[Outline Dimension]


Unit: mm

Scale: 1/1

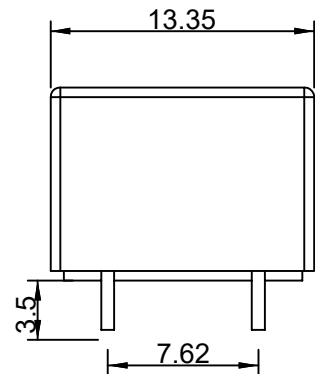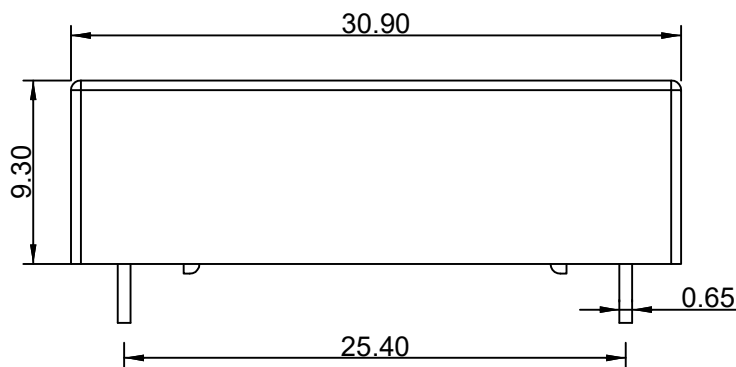

[Pin Layout]


[Top View]

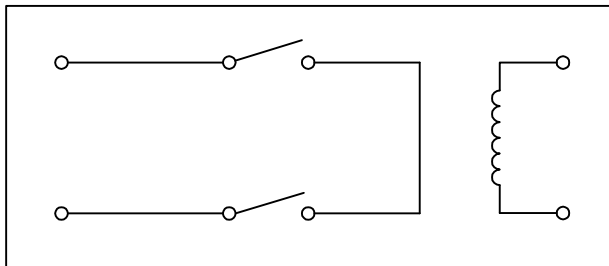

Order Information

HVR12-2A06-P00

Coil Parameters		Relay Parameters	
1 Nominal coil voltage	12 VDC	1 Min Breakdown Voltage	7K VDC
2 Max Operating voltage	16 VDC	2 Dielectric Strength coil/contact	7K VDC
3 Max Pull-in voltage	9 VDC	3 Insulation Resistance coil/contact	1.00E+12ohm
4 Min Drop-out voltage	1 VDC	4 Operate Time, incl. Bounce	1.0ms
5 Coil Resistance	250ohm	5 Reset Time	0.1ms
Contact Parameters		6 Capacitance Across Contacts	0.2pF
1 Max Contact Rating	100 W	7 Storage Temperature	-35~+105℃
2 Max Switch Voltage	1000 VACpeak/VDC	8 Operating Temperature	-20~+70 ℃
3 Max Switch Current	1.0 A	9 Soldering Temperature	5 sec.max 260℃
4 Max Carrying Current	2.5 A		
5 Min Breakdown Voltage	7K VDC		
6 Max Contact Resistance	150*2 mohm		

Version: 01	Designed by		TITLE	
	Checked by		High Voltage Reed Relay	
	Approved by		P/N	Scale: 1:1
	Date	26th, Oct, 2021	HVR12-2A06-P00	Page: 1/1