



HVR1A12

- High Voltage Reed Relay
- Low Contact Resistance
- Breakdown up to 4 kVDC
- Excellent Lifetime Characteristics
- Custom Design Available




Outline Dimension


Unit: mm DIM Tolerance: ±0.3

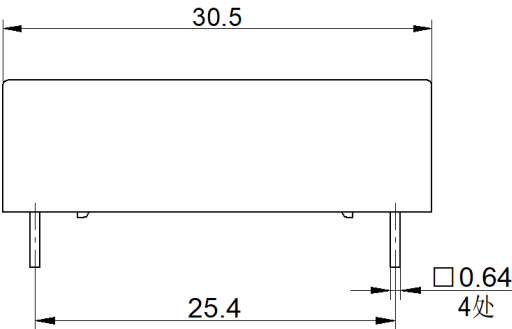

Layout[Top View]



Marking



Coil Parameters (at 20℃)						
Nominal Coil Voltage	Nominal Current	Coil Resistance	Max Pull-in Voltage	Min Drop-out Voltage		
12 VDC	19 mA	620±10% Ω	9 VDC	1 VDC		
Contact Parameters						
Contact Form	1 Form A	Max Contact Rating	100 W			
Max Switch Voltage	1 kVDC	Max Switch Current	1.0 A			
Max Carrying Current	2.5 A	Min Breakdown Voltage	4 kVDC			
Max Contact Resistance	150 mΩ	Life Expectancy (Electrical) (at 500 VDC 100mA)	5×10 ⁷ ops			
Electrical Specifications						
Dielectric Strength (Static,min)	Open contacts	4 kVDC	Insulation Resistance (min./typ.) Rh<45%, 100V Test Voltage	Open contacts	1×10 ¹² Ω	
	Contact to coil	4 kVDC		Contact to coil	1×10 ¹² Ω	
Operate Time,incl.Bounce		1.0 ms	Capacitance	Across Open Switch	0.5 pF	
Reset Time		0.1 ms				
Environmental data						
Vibration (10 to 2KHz 1.5mm)		20 G	Shock (1/2 sine wave duration 11ms)		50 G	
Operating Temperature		-20℃ ~ 70℃	Storage Temperature		-35℃ ~ 105℃	
Soldering Temperature (5 sec. dwell)		260℃	Washability		fully sealed	
Example of order marking						
Product model	Contact form	Nominal Coil Voltage		Pin Out		Special code
HVR	1A: 1 Form A	12: 12 VDC		Nil		Nil

Remark: RoHS	Make	Li Linmao	TITLE High Voltage Reed Relay P/N HVR1A12	 Version: 04 Page: 1/1
	Checke	Hu Shu		
	Approved	Dong Hu		
	Date	8th,Jan,2025		