


SIP-HV1A05-HR

- High Voltage Reed Relay
- Low Contact Resistance
- Breakdown up to 3KV
- Excellent Lifetime Characteristics
- Custom Design Available


[Outline Dimension]

Unit: mm Scale: 1/1

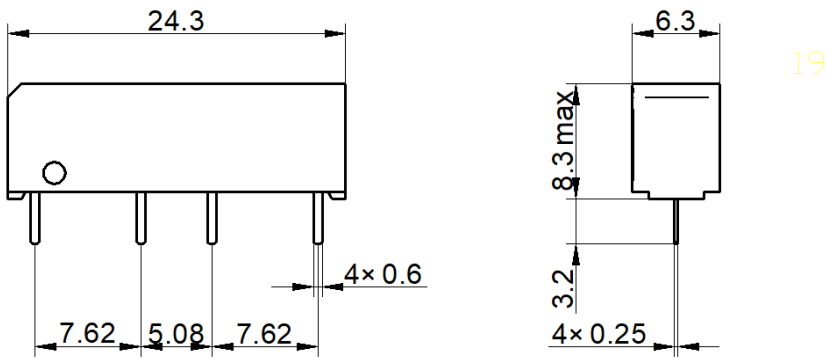

[Pin Layout]

[Wiring diagram]

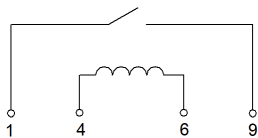

Order Information

SIP-HV1A05-HR

Coil Parameters		Relay Parameters	
1 Nominal coil voltage	5 VDC	1 Min Breakdown Voltage	3K VDC
2 Max Operating voltage	15 VDC	2 Dielectric Strength coil/contact	3K VDC
3 Max Pull-in voltage	3.75 VDC	3 Insulation Resistance coil/contact	1.00E+12ohm
4 Min Drop-out voltage	0.5 VDC	4 Operate Time, incl. Bounce	1.0ms
5 Coil Resistance	500 ohm	5 Reset Time	0.25ms
Contact Parameters		6 Capacitance Across Contacts	1.0pF
1 Contact Form	1 Form A	7 Storage Temperature	-40~+105℃
2 Max Contact Rating	100 W	8 Operating Temperature	-40~+85℃
3 Max Switch Voltage	1KVAC/1.5KVDC	9 Soldering Temperature	5 sec. max 260℃
4 Max Switch Current	1.0 A		
5 Max Carrying Current	2.5 A		
6 Min Breakdown Voltage	3K VDC		
7 Max Contact Resistance	150 mohm		

Version: 03

Designed by

Checked by

Approved by

Date

19th,Sep,2024

TITLE

High Voltage Reed Relay

P/N

SIP-HV1A05-HR



Scale: 1:1

Page: 1/1