

SIP-HV1A12DS-LPN


- High Voltage Reed Relay
- Low Contact Resistance
- Breakdown up to 4 kVDC
- Excellent Lifetime Characteristics
- Custom Design Available




Outline Dimension

Unit: mm DIM Tolerance: ±0.3

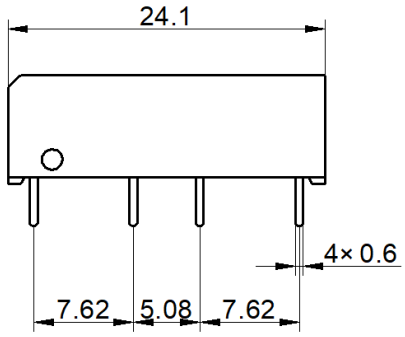




Layout [Top View]



Marking



Coil Parameters (at 20℃)

Nominal Coil Voltage	Nominal Current	Coil Resistance	Max Pull-in Voltage	Min Drop-out Voltage
12 VDC	24 mA	500±10% Ω	9 VDC	1.2 VDC

Contact Parameters

Contact Form	1 Form A	Max Contact Rating	100 W
Max Switch Voltage	1.5 kVDC	Max Switch Current	1.0 A
Max Carrying Current	2.5 A	Min Breakdown Voltage	4 kVDC
Max Contact Resistance	150 mΩ	Life Expectancy (Electrical) (at 5 VDC 10mA)	5×10^{8} ops

Electrical Specifications

Dielectric Strength (Static,min)	Open contacts	4 kVDC	Insulation Resistance (min./typ.) Rh<45%, 200V Test Voltage	Open contacts	1×10^{12} Ω
	Contact to coil	4 kVDC		Contact to coil	1×10^{12} Ω
Operate Time,incl.Bounce		1.0 ms	Capacitance	Across Open Switch	0.5 pF
Reset Time		0.25 ms			

Environmental data

Vibration (10 to 2KHz 1.5mm)	20 G	Shock (1/2 sine wave duration 11ms)	50 G
Operating Temperature	-40℃ ~ 85℃	Storage Temperature	-40℃ ~ 105℃
Soldering Temperature (5 sec. dwell)	260℃	Washability	fully sealed

Example of order marking

Product model	Contact form	Nominal Coil Voltage	Option		Special code
SIP-HV	1A：1 Form A	12：12 VDC	DS：Diode+Mangnetic Shield		LPN：Long Pin And Internal shielding

Remark: **RoHS**	Make	Li Linmao	TITLE High Voltage Reed Relay	
	Checke	Hu Shu		
	Approved	Dong Hu	P/N SIP-HV1A12DS-LPN	Version: 04
	Date	8th,Jan,2025		Page: 1/1