

# MH24-1A10K Mercury Wetted Reed Relay Datasheet

MiRelay model-level engineering reference for RFQ, cross-reference review and preliminary design-in. Company: SHR AUTOSENSOR TECH LIMITED. Website: www.reed-relay.com. Email: sales@reed-relay.com. Phone/WhatsApp: +86 137 6157 1029.



Product image is representative. Marking, terminal details and accessories can vary by exact option and customer drawing.


## Key selection parameters

| Parameter        | Engineering note  |
|------------------|---|
| Contact behavior | Stable low-bounce mercury-wetted contact                          |
| Orientation      | Vertical/orientation-sensitive installation to be validated       |
| Coil voltage     | 5 / 12 / 24 VDC common options                                    |
| Applications     | Pulse switching, ATE, instrumentation, low-resistance measurement |

## Ordering code interpretation

| Code block | Meaning                           |
|------------|-----------------------------------|
| MH         | Mercury-wetted high-voltage relay |
| 05/12/24   | Coil voltage                      |
| 1A         | Normally-open contact form        |
| 8K/10K     | Voltage class family              |

## Mechanical envelope and drawing guidance

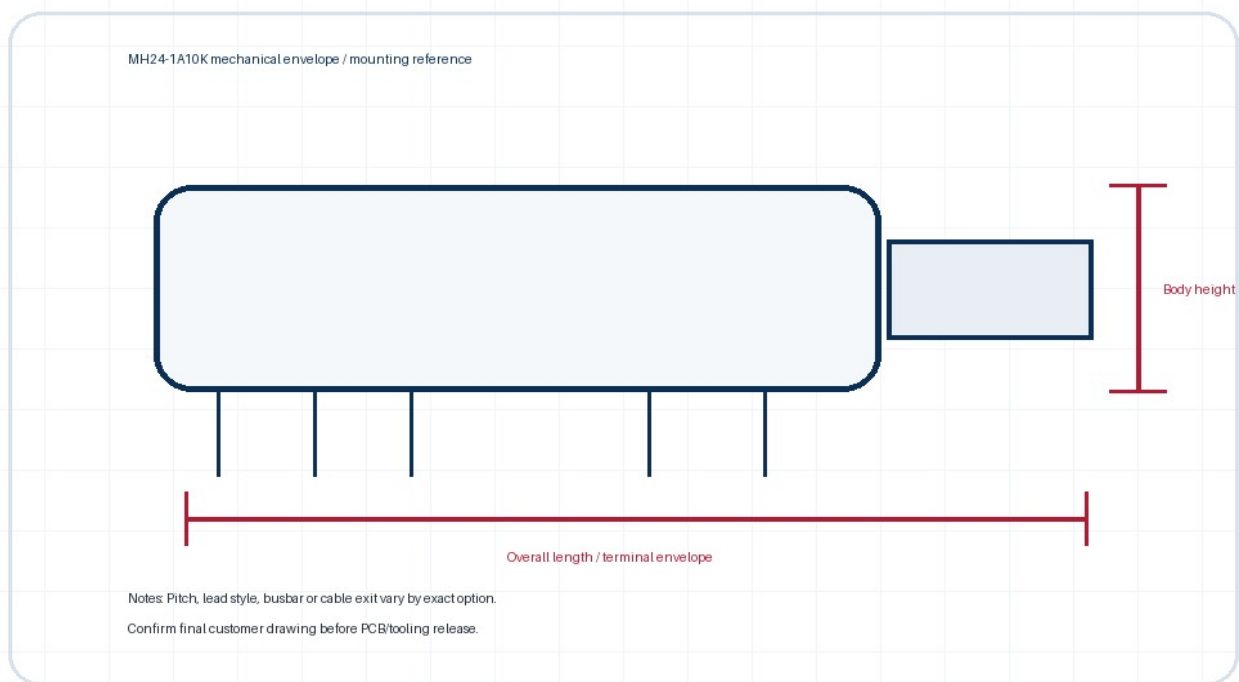

This drawing is an engineering envelope illustration prepared for selection and RFQ discussions. Use the final signed MiRelay drawing for PCB layout, mounting holes, busbar design, wire/cable exit, creepage/clearance and tooling release.

### RFQ / design-in checklist

Mercury acceptance in target market  
Mounting orientation and shock/vibration  
Switching voltage/current and duty cycle  
Contact resistance stability  
Regulatory and disposal handling

### Required information for quotation

Please send target model or competitor part number, electrical ratings, load type, coil/control voltage, package limits, environmental requirements, sample quantity and annual forecast to sales@reed-relay.com. Attach drawings or PCB constraints when available.

### Important notice

Preliminary engineering document. Specifications are derived from MiRelay family references and local product assets; they are not a substitute for final approval drawings, signed datasheets, customer validation or safety certification review. Mercury-wetted, high-voltage, medical, EV and PV applications require application-specific validation.