


HVR05-1A08-06-HC

High Voltage Reed Relay

PRODUCT VISUAL

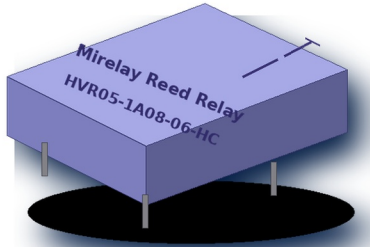

model specific generated package render is not intended for use as a reference. If the package render has wrong hvr2

KEY RATINGS

COIL VOLTAGE

5 VDC

CONTACT FORM

1 Form A

SWITCH VOLTAGE

7 kVDC

CONTACT RATING

200 W

OVERVIEW

- High voltage reed relay
- Breakdown up to 8 kVDC
- Extreme-environment operation
- Suitable for high current loads
- Excellent lifetime characteristics

COIL DATA

Nominal Coil Voltage	5 VDC
Nominal Current	100 mA
Coil Resistance	50±10% Ω
Max Pull-in Voltage	4 VDC
Min Drop-out Voltage	0.5 VDC

CONTACT RATINGS

Contact Form	1 Form A
Max Contact Rating	200 W
Max Switch Voltage	7 kVDC
Max Switch Current	3.0 A
Max Carrying Current	5.7 A
Min Breakdown Voltage	8 kVDC
Max Contact Resistance	200 mΩ
Life Expectancy	5×10⁷ ops @500V 100mA


ELECTRICAL CHARACTERISTICS

Dielectric Open Contacts	8 kVDC
Dielectric Contact/Coil	15 kVDC
Insulation Open Contacts	1×10¹² Ω
Insulation Contact/Coil	1×10¹² Ω
Operate Time incl. Bounce	3.0 ms
Reset Time	1.5 ms
Capacitance	0.8 pF across open switch


ENVIRONMENTAL / OPTIONS

Vibration	20 G, 10-2KHz 1.5mm
Shock	50 G, 11ms half-sine
Operating Temperature	-20°C to +70°C
Storage Temperature	-35°C to +105°C
Soldering Temperature	260°C, 5 sec max
Washability	Fully sealed

MECHANICAL OUTLINE / DIMENSIONS

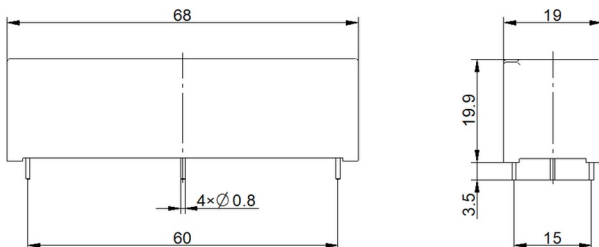

CIRCUIT / MARKING / TERMINAL VIEW



Mirelay Reed Relay
HVR05-1A08-06-HC

ORDERING & SOURCE TRACEABILITY

HVR05-1A08-06-HC — HVR, 05 = 5 VDC, 1A = 1 Form A, 08 = 8 kVDC, Pin Out = 06, Special = HC

Source: HVR05-1A08-06-HC.pdf

Technical values are preserved from source PDFs / generated metadata. Original outline and circuit figures are reused where available; do not treat artwork proportions as standalone dimensional authority.