


HVR12-1A08-P11

High Voltage Reed Relay

PRODUCT VISUAL



embedded pdf product render with exact hvr12 1a08 p11 marking

KEY RATINGS

COIL VOLTAGE
12 VDC

CONTACT FORM
1 Form A

SWITCH VOLTAGE
7 kVDC

CONTACT RATING
200 W

OVERVIEW

- High voltage reed relay
- Breakdown up to 8 kVDC
- Custom design available
- Suitable for high current loads
- Excellent lifetime characteristics

COIL DATA

Nominal Coil Voltage	12 VDC
Nominal Current	160 mA
Coil Resistance	75±10% Ω
Max Pull-in Voltage	9 VDC
Min Drop-out Voltage	1 VDC

CONTACT RATINGS

Contact Form	1 Form A
Max Contact Rating	200 W
Max Switch Voltage	7 kVDC
Max Switch Current	3.0 A
Max Carrying Current	20.0 A
Min Breakdown Voltage	8 kVDC
Max Contact Resistance	150 mΩ
Life Expectancy	5×10⁷ ops @500V 100mA


ELECTRICAL CHARACTERISTICS

Dielectric Open / Coil / Shield	8 / 10 / 10 kVDC
Insulation Open / Coil / Shield	1×10¹² Ω each
Operate Time incl. Bounce	3.0 ms
Reset Time	2.0 ms
Capacitance	0.8 pF across open switch



ENVIRONMENTAL / OPTIONS

Vibration	20 G, 10-2KHz 1.5mm
Shock	50 G, 11ms half-sine
Operating Temperature	-20°C to +70°C
Storage Temperature	-35°C to +105°C
Soldering Temperature	260°C, 5 sec max
Washability	Fully sealed

MECHANICAL OUTLINE / DIMENSIONS

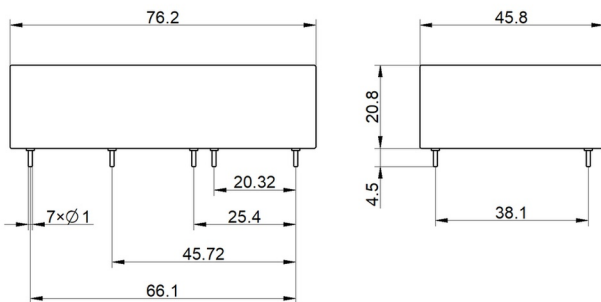

CIRCUIT / MARKING / TERMINAL VIEW



ORDERING & SOURCE TRACEABILITY

HVR12-1A08-P11 — HVR, 12 = 12 VDC, 1A = 1 Form A, 08 = 8 kVDC, Pin Out = P11, Special = Nil

Source: HVR12-1A08-P11.pdf

Technical values are preserved from source PDFs / generated metadata. Original outline and circuit figures are reused where available; do not treat artwork proportions as standalone dimensional authority.