

HVR1B05-05

High Voltage Reed Relay

PRODUCT VISUAL



exact embedded pdf product render with matching hvr1b05 05 marking

KEY RATINGS

COIL VOLTAGE

5 VDC

CONTACT FORM

1 Form B

SWITCH VOLTAGE

1 kVDC

CONTACT RATING

100 W

OVERVIEW

- High voltage reed relay
- Breakdown up to 2 kVDC
- High dielectric contact-to-coil design
- Low contact resistance
- Excellent lifetime characteristics

COIL DATA

Nominal Coil Voltage	5 VDC
Nominal Current	71 mA
Coil Resistance	70±10% Ω
Max Pull-in Voltage	4 VDC
Min Drop-out Voltage	0.5 VDC

CONTACT RATINGS

Contact Form	1 Form B
Max Contact Rating	100 W
Max Switch Voltage	1 kVDC
Max Switch Current	1.0 A
Max Carrying Current	2.5 A
Min Breakdown Voltage	2 kVDC
Max Contact Resistance	150 mΩ
Life Expectancy	5×10⁷ ops @500V 100mA


ELECTRICAL CHARACTERISTICS

Dielectric Open Contacts	2 kVDC
Dielectric Contact/Coil	15 kVDC
Insulation Open Contacts	1×10¹² Ω
Insulation Contact/Coil	1×10¹² Ω
Operate Time incl. Bounce	1.0 ms
Reset Time	0.1 ms
Capacitance	0.5 pF across open switch


ENVIRONMENTAL / OPTIONS

Vibration	20 G, 10-2KHz 1.5mm
Shock	50 G, 11ms half-sine
Operating Temperature	-20°C to +70°C
Storage Temperature	-40°C to +105°C
Soldering Temperature	260°C, 5 sec dwell
Washability	Fully sealed

MECHANICAL OUTLINE / DIMENSIONS

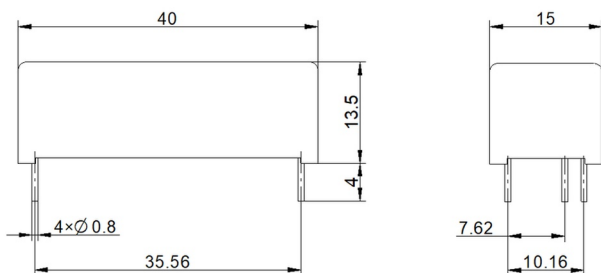

CIRCUIT / MARKING / TERMINAL VIEW



Mirelay
HVR1B05-05

ORDERING & SOURCE TRACEABILITY

HVR1B05-05 — HVR, 1B = 1 Form B, 05 = 5 VDC, Pin Out = 05, Special = Nil

Source: HVR1B05-05.pdf

Technical values are preserved from source PDFs / generated metadata. Original outline and circuit figures are reused where available; do not treat artwork proportions as standalone dimensional authority.