

HVR24-2A07-02

High Voltage Reed Relay

PRODUCT VISUAL



embedded pdf product render with exact hvr24 2a07 02 marking

KEY RATINGS

COIL VOLTAGE
24 VDC

CONTACT FORM
1 Form A

SWITCH VOLTAGE
1 kVDC

CONTACT RATING
100 W

OVERVIEW

- High voltage reed relay
- Breakdown up to 7 kVDC
- Custom design available
- Low contact resistance
- Excellent lifetime characteristics

COIL DATA

Nominal Coil Voltage	24 VDC
Nominal Current	22 mA
Coil Resistance	1100±10% Ω
Max Pull-in Voltage	18 VDC
Min Drop-out Voltage	2 VDC

CONTACT RATINGS

Contact Form	1 Form A
Max Contact Rating	100 W
Max Switch Voltage	1 kVDC
Max Switch Current	1.0 A
Max Carrying Current	2.5 A
Min Breakdown Voltage	7 kVDC
Max Contact Resistance	300 mΩ
Life Expectancy	5×10⁷ ops @500V 100mA


ELECTRICAL CHARACTERISTICS

Dielectric Open / Contact-Coil	7 / 15 kVDC
Insulation Open / Contact-Coil	1×10¹² / 1×10¹² Ω
Operate Time incl. Bounce	1.0 ms
Reset Time	0.1 ms
Capacitance	0.5 pF across open switch


ENVIRONMENTAL / OPTIONS

Vibration	20 G, 10-2KHz 1.5mm
Shock	50 G, 11ms half-sine
Operating Temperature	-20°C to +70°C
Storage Temperature	-35°C to +105°C
Soldering Temperature	260°C, 5 sec max
Washability	Fully sealed

MECHANICAL OUTLINE / DIMENSIONS

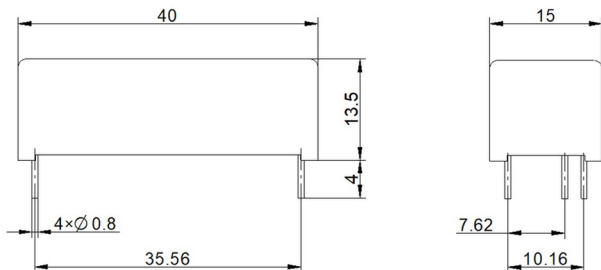

CIRCUIT / MARKING / TERMINAL VIEW



Mirelay
HVR24-2A07-02

ORDERING & SOURCE TRACEABILITY

HVR24-2A07-02 — HVR, 24 = 24 VDC, 2A = 1 Form A, 07 = 7 kVDC, Pin Out = 02, Special = Nil

Source: HVR24-2A07-02.pdf

Technical values are preserved from source PDFs / generated metadata. Original outline and circuit figures are reused where available; do not treat artwork proportions as standalone dimensional authority.