



SIP-HC1A24S

- High Voltage Reed Relay
- Low Contact Resistance
- Breakdown up to 4 kVDC
- Excellent Lifetime Characteristics
- Mercury relay alternative Reed relay




Outline Dimension


Unit: mm DIM Tolerance: ±0.3

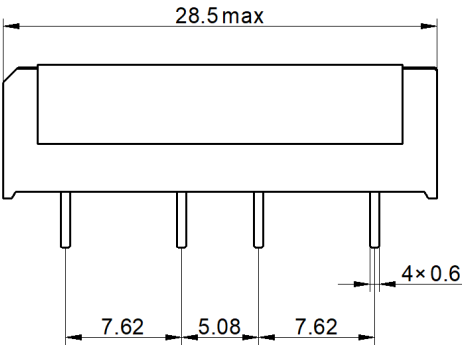

Layout[Top View]



Marking



Coil Parameters (at 20℃)

Nominal Coil Voltage	Nominal Current	Coil Resistance	Max Pull-in Voltage	Min Drop-out Voltage
24 VDC	6 mA	2000±10% Ω	18 VDC	2 VDC

Contact Parameters

Contact Form	1 Form A	Max Contact Rating	150 W
Max Switch Voltage	1.5 kVDC	Max Switch Current	2.0 A
Max Carrying Current	10 A	Min Breakdown Voltage	4 kVDC
Max Contact Resistance	35 mΩ	Life Expectancy (Electrical) Pulse current: 10A, 1.5ms/ON-15ms/OFF	1×10 ⁸ ops

Electrical Specifications

Dielectric Strength (Static,min)	Open contacts	4 kVDC	Insulation Resistance (min./typ.) Rh<45%, 200V Test Voltage	Open contacts	1×10 ¹² Ω
	Contact to coil	4 kVDC		Contact to coil	1×10 ¹² Ω
	Contact to shield	4 kVDC		Contact to shield	1×10 ¹² Ω
Operate Time,incl.Bounce	1.7 ms	Capacitance	Across Open Switch	0.5 pF	
Reset Time	0.5 ms				

Environmental data

Vibration (10 to 2KHz 1.5mm)	20 G	Shock (1/2 sine wave duration 11ms)	50 G
Operating Temperature	-40℃ ~ 85℃	Storage Temperature	-40℃ ~ 105℃
Soldering Temperature (5 sec. dwell)	260℃	Washability	fully sealed

Example of order marking

Product model	Contact form	Nominal Coil Voltage	Option	Special code
SIP-HC	1A: 1 Form A	24: 24 VDC	S: Magnetic Shield	Nil

Remark: RoHS	Make	Li Linmao	TITLE High Voltage Reed Relay P/N SIP-HC1A24S	 Version: 04 Page: 1/1
	Checke	Hu Shu		
	Approved	Dong Hu		
	Date	19th, Feb, 2025		